




# ZG-dSVG

ZG-dSVG Dynamic Reactive Power Compensation Device Product manual

## Integrated Energy Technology & Service Provider

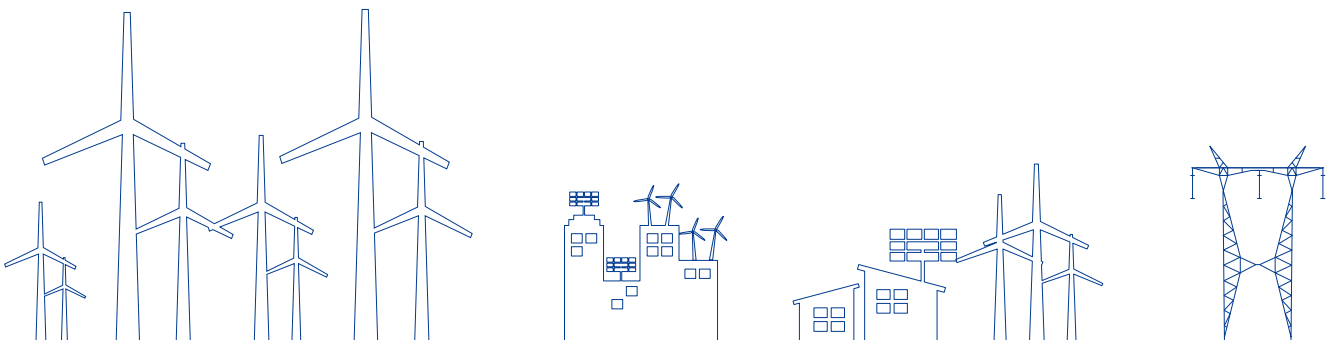

# Contents

|         |  |    |
|---------|--|----|
|         | Company Profile .....                            | 02 |
| ZG-dSVG | ZG-dSVG Introduction .....                       | 04 |
| 2.1     | Product Introduction .....                       | 04 |
| 2.2     | Application Scenario .....                       | 04 |
| 2.3     | Structure .....                                  | 06 |
|         | Specifications and Technical Features .....      | 09 |
| 3.1     | Model Description .....                          | 09 |
| 3.2     | Technical Parameter .....                        | 10 |
| 3.3     | Technical Features .....                         | 10 |
|         | Application Cases .....                          | 12 |
| 4.1     | Part of the Project Performance Table .....      | 12 |
| 4.2     | Application of Power Distribution Network .....  | 17 |
| 4.3     | Application of New Energy Power Generation ..... | 18 |
| 4.4     | Application of Industrial Load .....             | 19 |
|         | Honor and Qualification .....                    | 21 |



# 一、公司简介

2002

2

002169

HAPF

PCS

SVG

UPS

+



## Company Profile

Guangzhou Zhiguang Electric Technology Co., Ltd., established in 2002 with a registered capital of 200 million yuan, is a wholly-owned subsidiary of Guangzhou Zhiguang Electric Co., Ltd. [stock code: 002169, hereinafter referred to as Zhiguang]. It is a core member company of Zhiguang, which is specializing in flexible power technology research in the direction of integrated energy technology and service strategy development.

Since its establishment, the company has been focusing on the research of electrical control equipment technology with high-power electronics as its core technology, and conducting technical research and industrial applications in the fields of smart grid, distributed micro-grid, energy storage, motor control and energy conservation, power quality control, advanced power technology, etc. The main products include Distribution network neutral point grounding device, High-voltage variable frequency converting system, Energy storage power conversion system, Static Var generator(SVG), Intelligent high and low voltage shore power system, Low-voltage power quality management and Large industrial intelligent UPS.

The company's products have achieved regional coverage in the country and are exported to dozens of overseas countries and regions, contributing to the global energy conservation and emission reduction and green energy industry. The company uses the private cloud platform and big data as its technical means to give full play to the advantages of the Internet + and establishes a marketing and service platform centered on key industries, key regions and major customers, providing products, technologies and comprehensive technical solutions to thousands of customers in the power, building materials, metallurgy, chemical, coal, port, municipal, and new energy industries. Typical customers include China State Grid Corporation, China Southern Power Grid, Five Major Power Generation Groups, China General Nuclear Power Group, China National Building Materials Group Corporation, Sinopec, Petro China and Baowu Iron and Steel Group.

## 二、ZG-dSVG简介

### ZG-dSVG Introduction



### 2.1 产品简介 Product Introduction

ZG-dSVG

ZG-dSVG no longer uses large-capacity capacitors and inductors, but realizes the conversion of reactive energy through the high-frequency switching of power electronic devices, which has the incomparable advantages of traditional reactive power compensation equipment in terms of technical indexes such as compensation effect, power density and operation efficiency, and it is the best solution for the comprehensive management of power quality at present, which can effectively improve the transient stability of the grid voltage, inhibit the flicker of the bus voltage, compensate the imbalance current, filter out the harmonics, and improve the power factor.






### 2.2 应用场景 Application Scenario

SVG

ZG-dSVG series products can be widely used in petrochemical industry, new energy industry, coal industry, metallurgy, electrified railway, urban construction and other electric power industries to provide high-quality and reliable reactive power compensation solutions for various motors, lighting equipment, generators, welding machines, rolling mills, resistance furnaces and other equipment.






## 石油、化工、矿山、码头、重型工业 Petroleum, chemical, mining, dock, heavy industry




-  Stabilisation of supply voltage;
-  local dynamic compensation of reactive power for large motors;
-  Reduction of reactive power fluctuations and harmonics in traction drives.
-  Centralised compensation in substations supplying power to a larger number of medium and low voltage motors;
-  Centralised compensation of reactive power of relevant power-using equipment;






## 钢铁、冶金 Steel, metallurgy



-  Stabilise busbar voltage;
-  Reduce voltage fluctuation, inhibit flicker, improve production efficiency;
-  Balance negative sequence.
-  Improve power factor to reduce reactive power loss;
-  Filter out harmonics and ensure equipment safety;

## 城市配网及农网供电 Power supply to urban distribution networks and agricultural networks



-  Improve power factor to reduce reactive power loss;
-  Stabilise the voltage at the receiving end;
-  Protect the electric equipment from excessive reactive current leading to safety accidents.
-  Solve the voltage fluctuation and flicker generated by fluctuating loads;
-  Suitable for the centralised compensation of reactive power and harmonics for multiple users, especially where there are more shock-type loads;





The main controller consists of various functional boards to complete AC signal acquisition, switching control, PWM pulse distribution, status detection and system protection.

The power unit driver board is installed in the power unit and is connected to the main controller via optical fibre to convert the control signals into drive signals for the IGBTs and to provide feedback on the status of the power unit.

ZG-dSVG adopts LCD touch screen with complete data display (table, curcir q ° /e da


# 三、规格和技术参数

## Specifications and Technical Features

### 3.1 型号说明 Model Description

The products are categorised as follows:

- Y , W
- 35 35kV 10 10kV 35/10 35kV 10kV 06 6kV 35/6 35kV 6kV
- kVar
- H H
- Installation form: "Y" for indoor installation in "one" arrangement, "W" for outdoor installation.
- Voltage level: 35 means 35kV series, 10 means 10kV series; 35/10 means 35kV step-down 10kV series, 06 means 6kV series; 35/6 means 35kV step-down 6kV series.
- Rated capacity: unit kVar
- Product structure form: H for H-bridge cascade

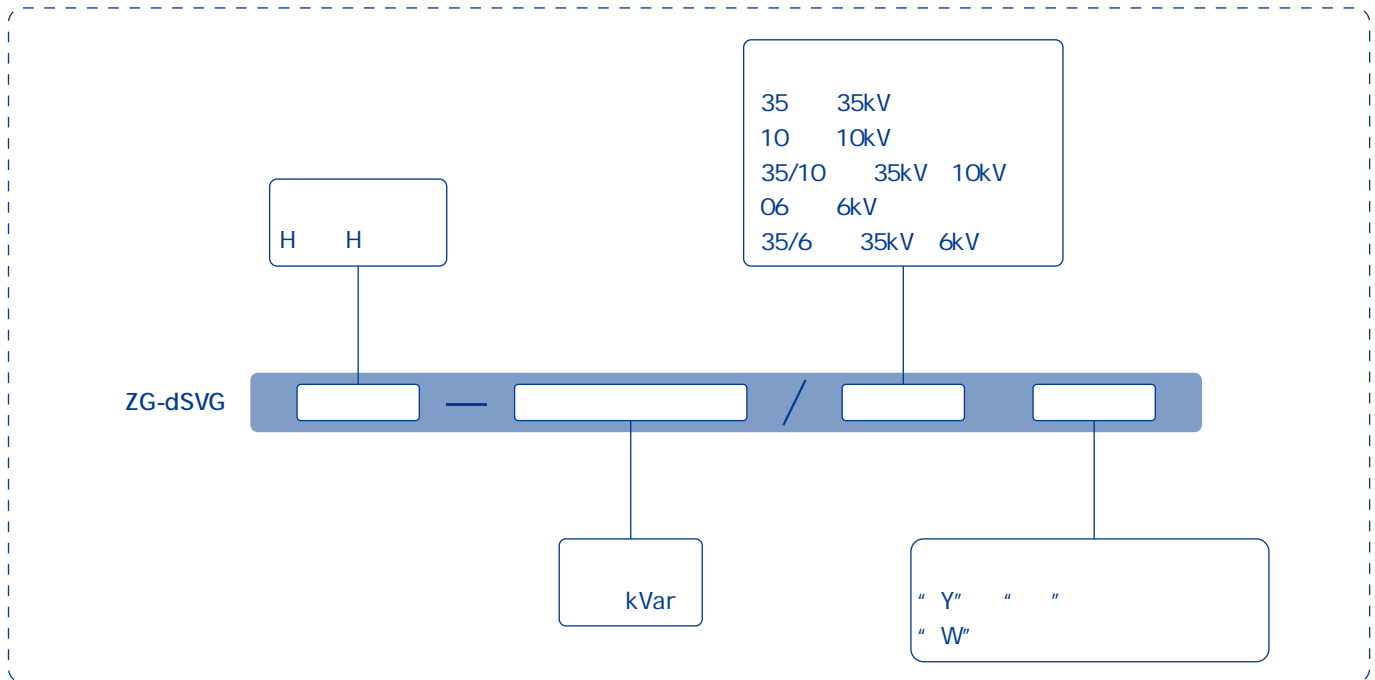

10kV ± 10000kVar H  
ZG-dSVG-H 10000/10Y

Example: A system with rated voltage of 10kV, rated compensation capacity of ± 10,000kVar, H-bridge cascade topology, and "one" type arrangement for indoor installation, the model number can be expressed as ZG-dSVG-H 10000/10Y.

## 3.2 技术参数 Technical Parameter

| Technical Indicators              | Technical Parameter   |
|-----------------------------------|---|
| 额定电压<br>rated voltage             | 6~35kV  |
| 补偿容量<br>compensation capacity     | 0.3~150Mvar   |
| 调节范围<br>Adjustable range          | 额定感性无功到额定容性无功连续无极调节<br>Continuously and infinitely adjustable from rated inductive reactive power to rated capacitive reactive power                                    |
| 额定频率<br>rated frequency           | 50Hz  |
| 响应时间<br>response time             | <4ms  |
| 过载能力<br>overload capacity         | 1.1倍持续3分钟<br>1.1x duration 3 minutes  |
| 谐波特性<br>harmonic characteristic   | 输出谐波电流总畸变率小于2%<br>Output harmonic current total distortion rate is less than 2%   |
| 冷却方式<br>Cooling method            | 风冷/水冷/空水冷<br>Air-cooled/water-cooled  |
| 运行模式<br>operating mode            | 恒功率因数/恒无功/恒电压/恒电流/电压无功综合/负荷补偿<br>constant power factor/constant reactive power/constant voltage/constant current/<br>voltage reactive power synthesis/load compensation |
| 安装方式<br>Installation              | 户内柜式、户外集装箱式<br>Indoor cabinet, outdoor container  |
| 环境温度<br>environmental temperature | -40°C~45°C  |
| 海拔高度<br>altitude                  | <3500m  |

## 3.3 技术特点 Technical Features

Fast response time and high voltage flicker suppression capability

ZG-dSVG      4ms

ZG-dSVG response time: 4ms, can complete the mutual conversion of rated capacitive to rated inductive reactive power in a very short time, which can satisfy the compensation of inrush loads, effectively inhibit the voltage flicker, and prevent grid accidents.

### ZG-dSVG

99

<2%

Cascaded ZG-dSVG adopts low-loss fully-controlled power devices, combined with special control algorithms to ensure performance and low loss, and the efficiency of the device is 99%; It can effectively inhibit high-frequency harmonic injection, and the output current distortion rate is <2% when compensating reactive power. Under the condition of sufficient capacity, it also has the functions of suppressing low harmonics and compensating unbalance.

### ZG-dSVG

ZG-dSVG air-cooled cooling system adopts intermediate air duct design with patented technology, and the cabinet top fan adopts long-life, maintenance-free external rotor motor and centrifugal fan with low-noise design, which ensures the safety and reliability of the overall system.

### ZG-dSVG

With Hall detection and unit self-test function in standby, and self-test and protection function in voltage, current and temperature after the system is running, faults can be detected in time and isolated automatically to ensure that the system will not affect the power grid and the equipment at the load side.

In addition, ZG-dSVG products with bypass function can maintain stable operation during fault isolation.

### ZG-dSVG

ZG-dSVG has constant voltage compensation mode in addition to the conventional constant power factor compensation and constant reactive power compensation functions, and high and low voltage traversing functions to cope with new energy power generation; High-voltage self-checking and self-starting function to cope with extremely unstable power grid;

Possessing multiple parallel operation technology to cope with the site of super-large capacity as well as multiple busbars and multiple systems, and obtaining the patented technology. (Optional functions)





| NO.   | 项目名称<br>project name   | 容量<br>capacity kVar         | 电压<br>volotage kV | 套数<br>set | 应用场景<br>application scenario              |
|---|--|-----------------------------|-------------------|-----------|---|
| 21  | Jinnan Iron & Steel Section Steel Fourth Workshop Project \Fifth Workshop Project  | SVG:5000<br>FC5000(5\7\11)  | 10                | 4         | Rolling mills                             |
| 22  | Chongqing Iron & Steel Seamless Steel Pipe Environmental Relocation Project Ancillary Projects                                 | SVG:4000<br>FC:4000(5\7\11) | 10                | 2         | Steel Industry                            |
| 23  | Chengde Jianlong Iron & Steel Vanadium-Titanium High-Tech Medium Bar Project   | 3000                        | 10                | 2         | Rolling mills                             |
| 24  | SVG<br>New SVG Project in Finishing Heat Treatment Area of Baowu Group Echeng Iron & Steel Co.                                 | SVG:1000<br>FC:1000(5)      | 10                | 4         | Rolling mills                             |
| 25  | EPC<br>Dagang Relocation and Upgrading Project-Rolling Unit-High Line Section EPC General Contracting Project                  | SVG:2000<br>FC:2400         | 10                | 4         | Rolling mills                             |
| 26  | High-end Coating Project of Rizhao Yulan New Material Co.  | SVG:5000<br>FC 5000(5\7\11) | 10                | 4         | Rolling mills                             |
| 27  | Sichuan Dazhou Iron and Steel Group Company Limited Relocation Project Steel Rolling Project                                   | SVG 6000<br>FC 6000(5\7\11) | 10                | 4         | Rolling mills                             |
| 28  | 1580mm<br>High-voltage reactive power compensation for Tangshan Shanhua Iron & Steel 1580mm hot-rolled broadband steel project | SVG 4000<br>FC 4000(5\7\11) | 10                | 2         | Rolling mills                             |
| Aluminum processing industry                                |  |                             |                   |           |   |
| 1   | Xinjiang Rongze Aluminum Foil Phase II Reactive Power Compensation and Harmonic Treatment Equipment Procurement Contract       | SVG:4000<br>FC:3000         | 10                | 2         | Aluminum deep processing                  |
| 2   | Southwest Aluminum reactive power compensation renovation project  | 15000                       | 6                 | 2         | Aluminum deep processing<br>Rolling mills |
| 3   | SVG<br>Dingsheng Aluminum Thailand New Plant Rolling Mill SVG Project  | 10000                       | 10                | 1         | Aluminum processing                       |
| 300+ Coal mining industry Cumulative 300+ sets in operation |  |                             |                   |           |   |
| 1   | SVG<br>Shanxi Maoshang Coal Industry Phase II Substation SVG Project   | 3000                        | 10                | 2         | Coal distribution                         |
| 2   | SVG+FC<br>SVG+FC project of Xishan Coal and Power Tunlan Mine's six wind shafts  | SVG 2100<br>FC 2100         | 6                 | 2         | Coal distribution                         |
| 3   | 35kV<br>Bazhou Dongchen Industry and Trade Co., Ltd. 35kV Substation of No.2 Mine, Tariq District, Yangxia Mining Area         | 4000                        | 10                | 2         | Coal                                      |
| 4   | 35kV<br>35kV Substation of Xinjiang Shenxin Yangxia Mining Co.   | 5000                        | 10                | 2         | Coal                                      |
| 5   | SVG<br>Huaihe Energy Guqiao Mine Central Substation SVG System Modification Project  | 17000                       | 10                | 2         | Central Substation corner connection      |
| 6   | SVG<br>SVG Project of Longbai Panzihua Mineral Products Co.  | 3000                        | 10                | 1         | phosphate ore                             |
| 7   | Project of Yqi Xinmiao Township Shichangwan Coal Mine Co.  | 2000                        | 10                | 1         | Coal                                      |
| 8   | 110kV<br>Huainan Mining Pojianghaizi Mine Inner Mongolia Yinhong Energy Company Ground 110kV Substation                        | 6000                        | 10                | 2         | Coal                                      |



\*

| NO. | 项目名称<br>project name  | 容量<br>capacity kVar | 电压<br>volotage kV | 套数<br>set | 应用场景<br>application scenario                  |
|-----|---|---------------------|-------------------|-----------|---|
| 4   | SVG<br>Procurement of SVG Equipment for Fracturing in Jiangsu Oilfield  | 2500                | 10                | 1         | oilfield production                           |
| 5   | 2#6kV<br>Henan Kaixiang Fine Chemical Co., Ltd. 2#6kV reactive power compensation device technical reform project | 5000                | 6                 | 2         | fine chemicals                                |
| 6   | SVG<br>New substation reactive power compensation SVG project of Xinpangnan Coking Co.                            | 12600               | 10                | 2         | Coking coal to coke, coke oven gas and others |
| 7   | 23 SVG<br>Kailuan Chemical 23rd year the first batch of coal mine conversion SVG procurement                      | 10000               | 6                 | 4         | Chemical                                      |
| 8   | 10 SVG<br>Procurement of SVG equipment for 100,000-ton carbon utilization R&D platform                            | 1500                | 10                | 1         | Chemical                                      |
| 9   | 17-2/23-6<br>Ushi 17-2/23-6 Oilfield Cluster Joint Development Project  | 4000                | 35                | 1         | oil exploration                               |
| 10  | Ground Engineering for Baimiao Shallow Gas Storage Project in Zhongyuan Oilfield                                  | 5000                | 10                | 2         | oil exploration                               |
|     | 10kV<br>Hunan Erkang Pharmaceutical 10kV Power Distribution Project   | 4000                | 10                | 1         | pharmaceutic                                  |
|     | SVG<br>China Coal Xuyang Chemical SVG Retrofit Project  | 4000                | 10                | 1         | Chemical                                      |
|     | W<br>Power Station of Longhua Coal Industry Urea Comprehensive Utilization Project                                |                     |                   | 4000<br>2 | coal chemical                                 |
|     |   |                     |                   |           |   |



## 4.3 新能源发电的应用

### 华电集团某风电场动态无功补偿项目

|        |         |        |          |      |    |
|--------|---------|--------|----------|------|----|
| 35kV   | ± 8MVar |        | 7MVar FC |      |    |
| 49.5MW | 33      | 1500kW |          | 3500 | FC |
|        | SVG     |        |          |      |    |

Zhiguang's self-developed 35kV direct-hanging ± 8MVar high-voltage dynamic reactive power compensation device and 7MVar FC inductive reactive power compensation device were formally put into operation at the wind farm of Huadian Group. The construction scale of this wind farm is 49.5MW, with 33 wind turbines of 1500kW capacity, and the wind farm is at an altitude of 3500 metres above sea level.

On the one hand, the fixed inductive reactive power is compensated by the FC inductive reactive power compensation device, and on the other hand, the residual reactive power of the SVG grid is dynamically compensated, which meets the demand for reactive power compensation at the site and stabilises the power factor, and saves the cost of larger capacity reactive power compensation device, site and related construction costs.

|      |        |     |       |
|------|--------|-----|-------|
| 35kV | 40MVar | SVG | 100MW |
|------|--------|-----|-------|

Zhiguang's self-developed 35kV direct-mounted 40MVar water-cooled high-voltage dynamic reactive power compensation device SVG was officially put into operation at Huaneng Group's 100MW wind farm. Wind power generation projects are affected by the weather, with large fluctuations in voltage drop amplitude and low power factor. The project installed ZG-dSVG water-cooled reactive power compensation device on the 35kV bus side according to the actual situation of the site to suppress voltage fluctuation and improve the bus power factor.



**宁夏某光伏电站多套高压动态无功补偿装置并联运行项目**  
 Ningxia photovoltaic power station multiple sets of high-voltage dynamic reactive power compensation device parallel operation project

2 360MVA      6 35kV      24MVar      SVG      220kV  
 35kV      35kV      3

ZG-dSVG      3 SVG

Six sets of 35kV direct-mounted 24MVar water-cooled SVGs with multiple parallel operation developed by Zhiguang were officially put into operation at a Ningxia PV power station. The 220kV photovoltaic booster station is installed with two 360MVA main transformers and two 35kV busbars. According to the situation of large grid-connected capacity and two sections of buses, three sets of water-cooled dynamic reactive power compensation devices are installed on the side of each section of 35kV buses, and at the same time, the centre screen is used to calculate the reactive power of the buses at the grid end, so as to realize the synchronous operation of three sets of SVGs, which can satisfy the requirements of suppressing voltage fluctuation and improving the power factor of buses at the site.




**4.4 工业负荷的应用 Application of Industrial Load**

**河北某钢铁热轧系统动态无功补偿项目**  
 Hebei Iron & Steel Hot Rolling System Dynamic Reactive Power Compensation Project

10kV      ± 6MVar SVG      6MVar FC  
 FC      SVG

Zhiguang's self-developed 10kV direct-hanging ± 6MVar SVG and 6MVar FC filtering device was formally put into operation at Hebei Iron and Steel Hot Rolling Mill. The site has large load shocks, large voltage dips, low power factor, and many harmonics exceeding the standard. The FC compensates for many harmonics in the bus, and the SVG compensates for grid reactive power and capacitive reactive power during harmonic compensation, effectively suppressing voltage fluctuations brought about by the steel hot rolling process and stabilising the power factor on the bus side.

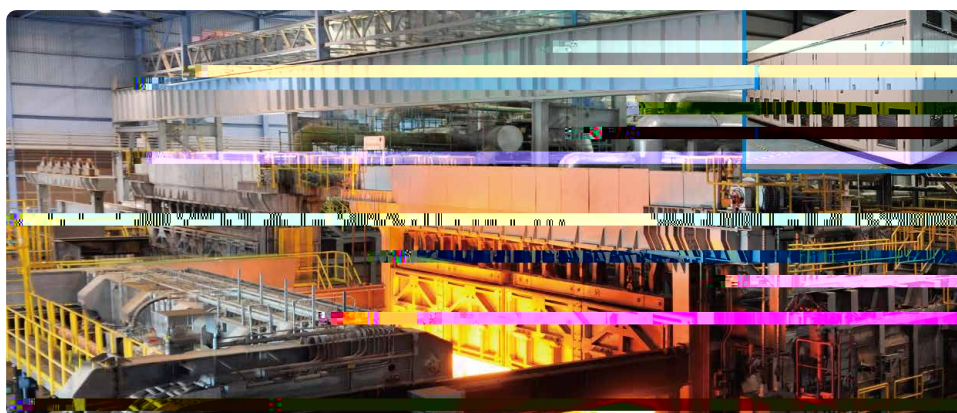

## 淮南矿业动态无功补偿项目

Huainan Mining Industry Dynamic Reactive Power Compensation Project

10kV± 7MVar SVG 3MVar FC  
FC SVG

Zhiguang independently developed 10kV± 7MVar SVG and 3MVar FC filtering device was put into operation in Huainan Mining Industry. The site has large load shocks, large voltage dips, low power factor, and many harmonic exceedances. FC compensates for many harmonics at the busbar, and SVG compensates for grid reactive power as well as capacitive reactive power during harmonic compensation, effectively suppressing voltage fluctuations and stabilising the power factor at the busbar side.



## 山西某钢铁优钢35kV变电站动态无功补偿项目

Shanxi Iron & Steel 35KV Substation Dynamic Reactive Power Compensation Project

35kV 2 10MVar 10kV

The new construction of 35kV substation of Shanxi Steel adopts two sets of 10MVar 10kV dynamic reactive power compensation devices. The site voltage fluctuation is large, harmonic pollution is serious, three-phase imbalance and other problems lead to the overall power factor is low. Therefore, the dynamic reactive power compensation device effectively reduces voltage fluctuation, stabilises bus voltage, improves power factor and reduces reactive power loss.





24小时客户服务中心:400-8800-233  
24h Service:400-8800-233



Guangzhou ZhiGuang Electric Technology Co., Ltd.

Add:广州市黄埔区云埔工业区埔南路51号  
NO.51 Punan Road,Yunpu Industry Zone, Huangpu District Guangzhou,P.R.China.  
Tel:020-32113398  
Fax:020-32113456  
Web:www.gzzg.com.cn  
Zip:510760

2024